


Flowmeters for medium flow with needle valve

The RIV210 series flowmeters with needle valve are produced entirely in Plexiglas with guided float produced in different materials: AISI 316, Hastelloy or PVC for aggressive liquid.

They are equipped with nickel-plate brass rear needle valve.

The precision of the instrument is: $\pm 5\%$ fs.
The maximum working pressure is 10 bar.
The maximum temperature is 70°C.

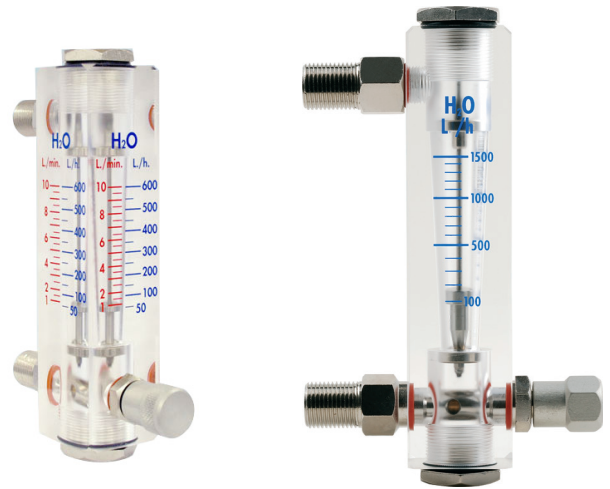

Technical features

Type	Standard ranges		Threaded connections			
	Water L/h	Air Nm ³ /h	G	L	I	C
RIV210-1/R	120	6	3/8" - 1/2"	160	115	40
	200					
	300					
	400					
	500					
RIV210-2/R	600	15	3/8" - 1/2"	190	140	45
	800					
	1200					
	1500					
	2000					
RIV210-1/RA	120	6	3/8" - 1/2"	215	170	40
	200					
	300					
	400					
	500					
RIV210-2/RB	600	15	3/8" - 1/2"	255	205	45
	800					
	1200					
	1500					
	2000					

