

LFV200

VIBRATING SWITCHES

LEVEL



Tutti i dati ed i contenuti di questa scheda sono di proprietà esclusiva di Riels Instruments

LFV200

The intelligent limit switch for all kinds of liquids

LEVEL SENSORS



Technical data overview

Measurement principle	Vibrating level switch
Detection principle	Contact
Medium	Fluids
Measurement	Switch
Process temperature	-40 °C ... +150 °C (depending on type)
Process pressure	-1 bar ... 64 bar
Output signal	Non-contact switch Transistor output PNP Transistor output PNP with IO-Link (depending on type)
Accuracy of sensor element	± 2 mm

Product description

The vibrating level switch of the LFB200 product family detects the pre-defined levels in liquid systems with maximum precision. Whether indicating that a container has reached its maximum fill level (overflow protection) or that it is empty or used in pipes to prevent the pumps from running dry, the LFB200 works with all liquids and is wear- and maintenance-free. A high surface quality and the rugged tuning fork made of stainless steel make the LFB200, in combination with aseptic process connections, the first choice for applications even with the strictest hygiene requirements. With the LFB230, extended pipe variants up to 1,200 mm are available. With IO-Link, the oscillation frequency, amplitude and temperature of the sensor can be read out in addition to the switching signal, which enables extended diagnostics and predictive maintenance.

At a glance


- Commissioning without container filling or medium calibration
- Immune to deposit formation
- Process temperature up to 150 °C
- Two electrical output versions and IO-Link available
- Pipe extension up to 1,200 mm
- Hygienic designs with polished surface, CIP- and SIP-capable
- Housing made of 316L stainless steel
- Very high repeatability

Your benefits

- Universal and reliable technology for nearly all liquids and applications
- Can be used in containers and pipes regardless of the mounting situation
- Easy installation and commissioning, no medium calibration necessary
- Easy operation and system integration
- Maintenance-free system
- Sensors can be tested while installed
- Frequency, amplitude and temperature of the sensor can be read out via IO-Link
- Extended pipe variants for more flexibility

Fields of application

- Point level measurement in storage tanks
- Point level measurement in release agent tanks
- Monitoring of pouring machine supply lines
- Point level measurement in CIP reservoirs
- Monitoring of hydraulic and coolant systems

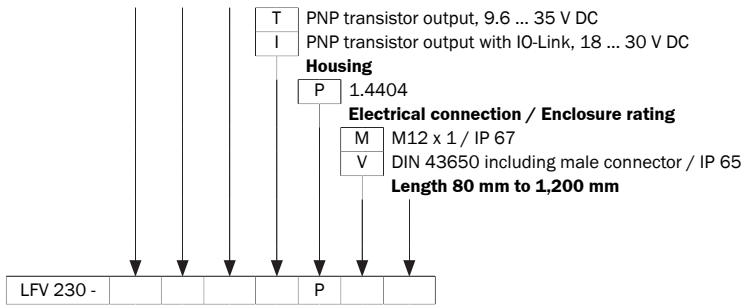

Not all variants of the type code can be combined!