

### Differential pressure for air or non-aggressive and non-inflammable gas control

#### Function:

Differential pressure for air or non aggressive and non inflammable gases control.  
Alarm activation at a pre-set value.

#### Applications:

Well-suited in domestic, commercial and industrial strong polluted areas in air conditioning and ventilating systems for:

- filter monitoring;
- correct fan operating control;
- low pressure and overpressure monitoring;
- deactivating of electrical heaters during air missing.

#### Note

Connector P1 of higher pressure or lower vacuum.  
Connector P2 of lower pressure or higher vacuum.  
Connector Ø 6.0 mm for hose PVC 5 x 8 mm.




TYPE	RANGE mbar	DIFFERENTIAL mbar	MAX PPRESSURE mbar
DBL-205A	0.3...4.0 (30...400 Pa)	0.15 ± 15%	100
DBL-205B	0.5...5.0 (50...500 Pa)	0.2 ± 15%	100
DBL-205C	0.2...3.0 (20...300 Pa)	0.1 ± 15%	100
DBL-205D	2...10 (200...1000 Pa)	1.0 ± 15%	100
DBL-205E	5...25 (500...2500 Pa)	1.5 ± 15%	100
Accessories	DBZ-06 - Connection set with 2 PVC duct connectors, 2 m flexible PVC pipe and 4 screws		
	DBZ-14A - Set with mounting bracket and screws		
	DBZ-14B - Set with mounting bracket and screws		

### Technical data

Contact:	according to EN 1854 (EN 60730) microswitch with SPDT contacts
Switch capacity:	1.5 (0.4) A, 250 Vac
Differential mBar:	fixed (see schedule)
Working temperature:	-20...+85°C 10...90% r.h. (without condensing)
Diaphragm:	silicone (LSR)
Storage:	-40...+85 °C < 90% r.h.
Housing:	PS
Protection:	IP54, class II
Max size	Ø 118 x h 57,5 mm
Weight:	180...210 g

### Dimensions (mm)

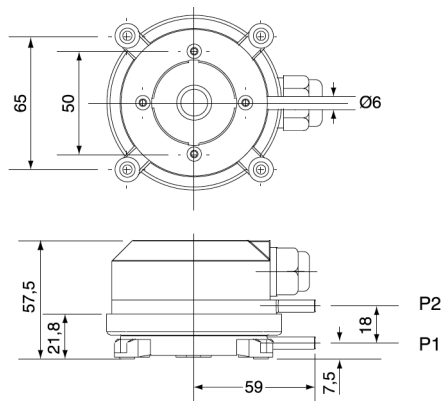

### Wiring diagram

The contact 2 - 3 closes and the contact 1 - 3 opens when the differential pressure rises (fig. 1).




fig. 1

### Accessories

